

# Korniche FlatLite™ surveying guide

## Upstand position cross section

When specifying the dimensions of your FlatLite, you should provide the external dimensions of your upstand and the fitted waterproof membrane

3 to 5° degree pitch

Upstand width 75 - 85mm

Upstand min 150mm

To ensure the upstand is square **a** & **b** should be equal with a tolerance of +/-4


\*Maximum area is limited to 3m<sup>2</sup>

**A:** Trim - ceramic coating 120mm

**B:** Plasterboard

**C:** Indicative structure (by others)

**D:** Waterproof membrane

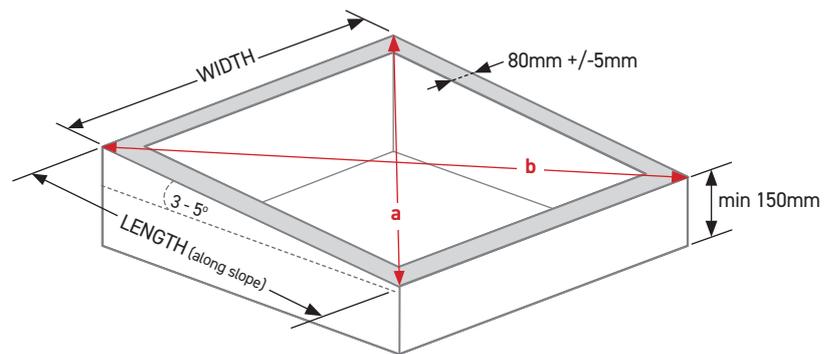

Recommended upstand detail - Available to order with FlatLite on KWIKQUOTE

